



See page 32 for 5.9 oz single chamber billet aluminum reservoir for use with 76-Series master cylinders

### 3-Chamber Aluminum Reservoirs

TB&C's 3-Chamber billet aluminum reservoirs combine two brake fluid reservoirs and a clutch fluid reservoir into one convenient package. High Capacity and Low Profile reservoir options are available.

- Three separate internal reservoirs allow for complete evacuation of one, without affecting the remaining two.
- Reservoir caps have a double-baffle system and an o-ring to ensure proper sealing.
- A hose connection is provided if an external baffle system is desired.
- The removable lid provides easy access to the reservoirs for cleaning and maintenance.
- O-ring sealed AN4 fittings are included.

#### Reservoir Capacity

Reservoir	Front Brakes	Rear Brakes	Clutch
High Capacity	13.4 oz (396 ml)	8.7 oz (257 ml)	4.7 oz (139 ml)
Low Profile	8.9 oz (263 ml)	5.7 oz (168 ml)	3.2 oz (95 ml)
2-Chamber	8.3 oz (245 ml)	5.7 oz (168 ml)	N/A

#### Description

- 3-Chamber aluminum reservoir, high capacity
- 3-Chamber aluminum reservoir, low profile
- 2-Chamber aluminum reservoir, low profile

#### Part Number




- 72-570
- 72-575
- 72-578

#### Service Parts

- Replacement cap assembly
- O-ring for reservoir cap
- Lid gasket
- Fitting, AN4 male/AN4 male
- O-ring for fitting

#### Part Number

- 72-574
- 72-570-6
- 72-570-4
- 73-817
- 73-818

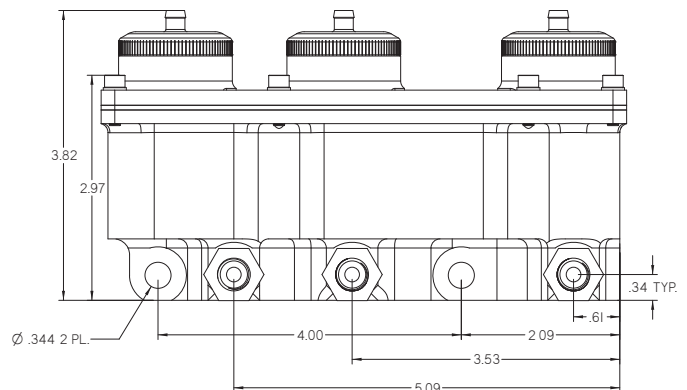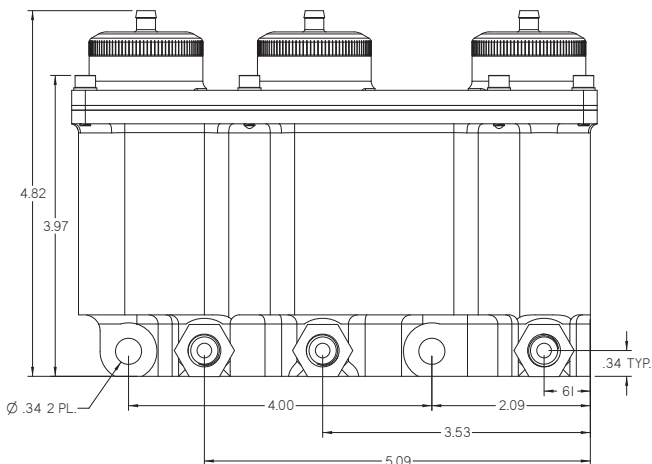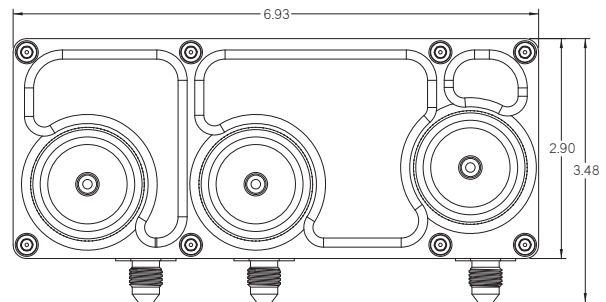

**3-Chamber Plastic Reservoirs**

TB&C's popular 3-Chamber Aluminum Reservoir is now available in a value-packed plastic version. These new reservoirs incorporate many features found in the billet aluminum version at a price that meets most budgets. There is no longer a reason to use three separate plastic reservoirs... this reservoir combines the three into one convenient package.

- Fiberglass reinforced nylon material.
- Three separate internal reservoirs allow for complete evacuation of one, without affecting the remaining two.
- Gasket-sealed removable lid allows for easy cleaning.
- Reservoir lid incorporates screens to prevent foreign objects (nuts, bolts) from falling into reservoir.
- Leak-proof baffle design ensures that fluid remains in reservoir.
- Convenient fluid level indicator windows
- 2-hole mount provides simple installation onto firewall/bulkhead .
- Available for use with push-on rubber hose or AN4 braided lines.

Reservoir Capacity		
Front Brakes	Rear Brakes	Clutch
9.8 oz (289 ml)	6.3 oz (186 ml)	4.0 oz (118 ml)

Description	Part Number
3-Chamber plastic reservoir, push-on hose type	72-576
3-Chamber plastic reservoir, AN4 type	72-577

Service Parts	
Replacement cap	72-576-6
Lid gasket	72-576-3
Fitting, AN4	72-577-2



**WARNING:** Teflon, EPDM or SBR hose must be used.



SBR Hose Kit available for use with TB&C reservoirs. 96" length with 6 clamps. (P/N 74-221)

