



**SL6R/ST WITH THERMLOCK® PISTONS CALIPER ORDERING INFORMATION:<sup>(1)</sup>**

BORE SIZE	DISC WIDTH	FRONT MOUNT PART NO.		REAR MOUNT PART NO.	
		RH	LH	RH	LH
1.62 / 1.12 / 1.12" 41,1 / 28,4 / 28,4 mm	1.25" 31,8 mm	120-6143-FS	120-6144-FS	120-6143-RS	120-6144-RS
1.62 / 1.12 / 1.12" 41,1 / 28,4 / 28,4 mm	1.25" 31,8 mm	—	—	—	120-6201-SI
1.62 / 1.12 / 1.12" 41,1 / 28,4 / 28,4 mm	1.00" 25,4 mm	120-6141-FS	120-6142-FS	120-6141-RS	120-6142-RS

**BILLET SL6R AND SL6R/ST WITH NARROWED OUTBOARD BODY:**

Calipers in this group feature a reduced width outboard body to provide additional clearance between the caliper face and the wheel or hub. These calipers were originally built for use with wide 5 hubs, but have found their way to OE performance "Big Brake" conversions, road racing, and other close fit wheel applications. The caliper bridge radius will clear rotors from 11.75" to 13.00" in overall diameter. Each caliper in this group uses 7420 type 20mm thick pads. Specific mounting and body width dimensions can be found in the chart on page 16.



Black


**NARROW SL6R WITH STAINLESS STEEL PISTONS CALIPER ORDERING INFORMATION:<sup>(1)</sup>**

BORE SIZE	DISC WIDTH	FRONT MOUNT PART NO.		REAR MOUNT PART NO.	
		RH	LH	RH	LH
1.62 / 1.12 / 1.12" 41,1 / 28,4 / 28,4 mm	1.25" 31,8 mm	120-7761-FS	120-7762-FS	120-7761-RS	120-7762-RS

**NARROW SL6R WITH THERMLOCK® PISTONS CALIPER ORDERING INFORMATION:<sup>(1)</sup>**

BORE SIZE	DISC WIDTH	FRONT MOUNT PART NO.		REAR MOUNT PART NO.	
		RH	LH	RH	LH
1.62 / 1.12 / 1.12" 41,1 / 28,4 / 28,4 mm	1.25" 31,8 mm	120-6385-FS	120-6386-FS	120-7761-RS	120-7762-RS

**SL6R BRAKE PAD TYPE 7420 - PAD VOLUME = 4.9 CU. IN.:**

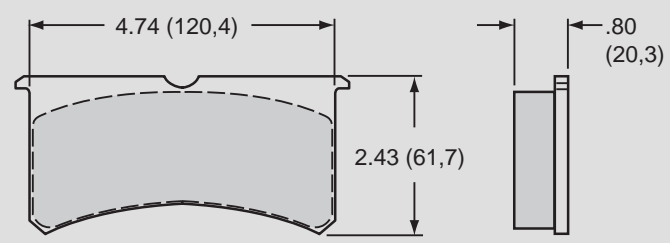

AXLE SET P/N	PAD TYPE / COMPOUND
15A - 5938K	7420 A PolyMatrix
15B - 5939K	7420 B PolyMatrix
15C - 6853K	7420 C PolyMatrix
15E - 6084K	7420 E PolyMatrix
15H - 8114K	7420 H PolyMatrix
15Q - 6829K	7420 Q PolyMatrix
150 - 8854K	7420 10 BP-10 Smart Pad
150 - 9416K	7420 20 BP-20 Smart Pad
150 - 9864K	7420 30 BP-30 Smart Pad
150 - 8323K	7420 SM For Titanium Rotor

NOTES: (1) REFERENCE FRONT OF MANUAL FOR GENERAL ORDERING INFORMATION  
 (2) THESE CALIPERS MAY ALSO BE USED WITH 1.10" THICK ROTORS AND 7416 TYPE 16MM THICK PADS  
 FS = FRONT SIDE MOUNT, RS = REAR SIDE MOUNT, SI = SIDE INLET