




UL-32 SERIES DIRECTIONAL VANE ROTORS:

Ultra-Light **UL-32** and **ULHP-32** directional vane rotors provide an excellent balance of efficient cooling and lower rotating mass on hard braking dirt tracks or rear axle service on pavement cars. **UL** rotors are cast from premium grade, long grain carbon iron for long wear, high thermal stability, and resistance to distortion.

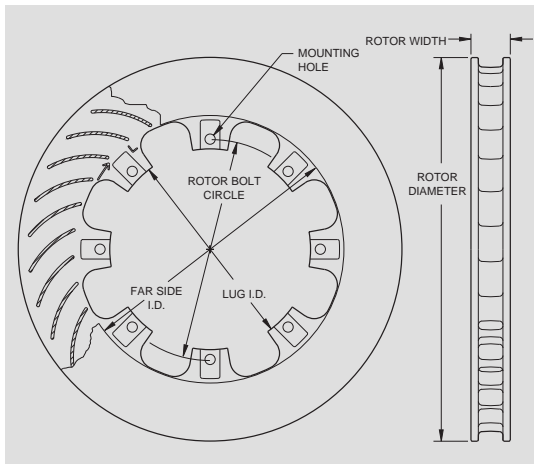

UL-32 rotors are production machined and well suited to a wide range of sportsman racing categories. **ULHP-32** rotors offered the added performance and smoother operation of precision turned faces with less than .001" variation in flatness, parallelism, or run-out.



ULHP-32 SERIES ROTOR ORDERING INFORMATION:

DIAMETER	WIDTH	BOLT CIRCLE	HOLE TYPE	FAR SIDE I.D.	LUG I.D.	WEIGHT LBS	RH / LH	PART NUMBER
12.19" (309,7)	1.25" (31,8)	8 x 8.50" (215,9)	.251"	9.10" (231,1)	7.88" (200,2)	8.7	RH	160-4574
12.19" (309,7)	1.25" (31,8)	8 x 8.50" (215,9)	.251"	9.10" (231,1)	7.88" (200,2)	8.7	LH	160-4575
12.19" (309,7)	1.25" (31,8)	8 x 7.00" (177,8)	.325"	8.50" (215,9)	6.38" (162,0)	10.4	RH	160-5845
12.19" (309,7)	1.25" (31,8)	8 x 7.00" (177,8)	.325"	8.50" (215,9)	6.38" (162,0)	10.4	LH	160-5846
11.75" (298,5)	1.25" (31,8)	8 x 7.00" (177,8)	.325"	8.34" (211,8)	6.38" (162,0)	9.6	RH	160-5847
11.75" (298,5)	1.25" (31,8)	8 x 7.00" (177,8)	.325"	8.34" (211,8)	6.38" (162,0)	9.6	LH	160-5848

UL-32 SERIES ROTOR ORDERING INFORMATION:

DIAMETER	WIDTH	BOLT CIRCLE	HOLE TYPE	FAR SIDE I.D.	LUG I.D.	WEIGHT LBS	RH / LH	PART NUMBER
12.19" (309,7)	1.25" (31,8)	8 x 7.62" (193,6)	5/16-24	8.50" (215,9)	7.13" (181,1)	10.1	RH	160-2900
12.19" (309,7)	1.25" (31,8)	8 x 7.62" (193,6)	5/16-24	8.50" (215,9)	7.13" (181,1)	10.1	LH	160-2901
12.19" (309,7)	1.25" (31,8)	8 x 7.00" (177,8)	.325"	8.50" (215,9)	6.38" (162,0)	10.5	RH	160-2894
12.19" (309,7)	1.25" (31,8)	8 x 7.00" (177,8)	.325"	8.50" (215,9)	6.38" (162,0)	10.5	LH	160-2895
11.75" (298,5)	1.25" (31,8)	8 x 7.00" (177,8)	.325"	8.34" (211,8)	6.38" (162,0)	9.6	RH	160-2898
11.75" (298,5)	1.25" (31,8)	8 x 7.00" (177,8)	.325"	8.34" (211,8)	6.38" (162,0)	9.6	LH	160-2899