


Compact Remote

COMBINATION MASTER CYLINDER KIT



Actual Size - 10 oz. Direct Mount Reservoir

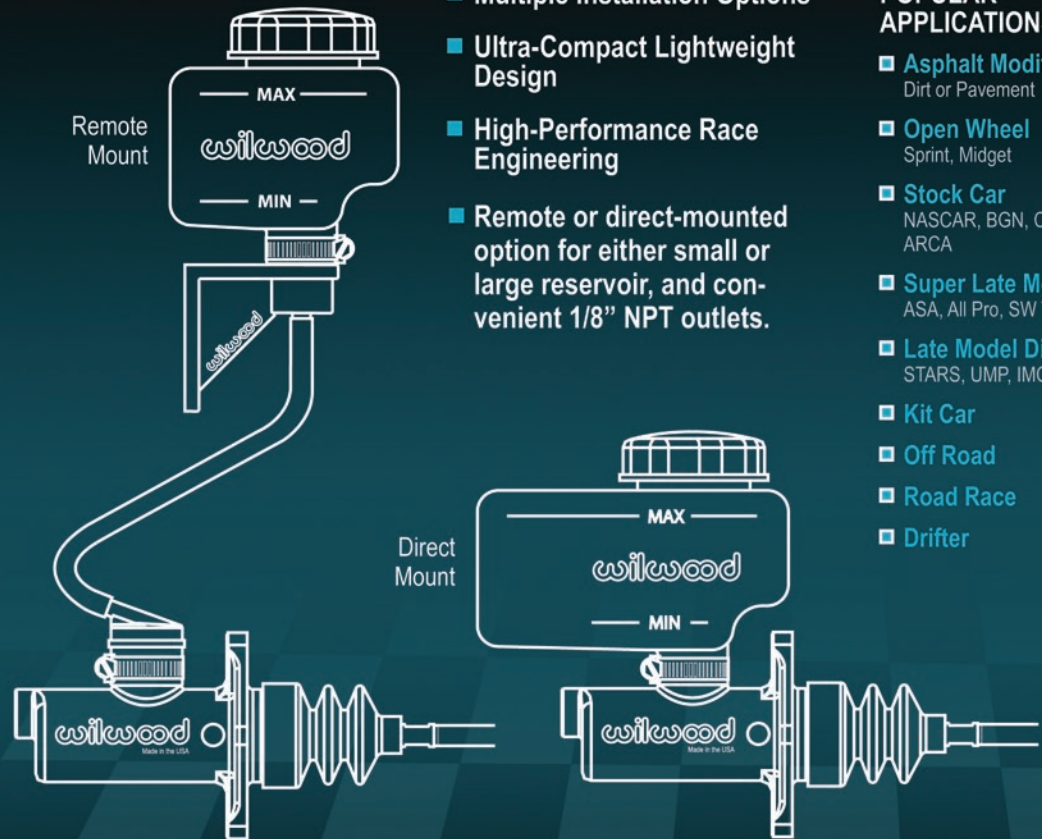

- Multiple Installation Options
- Ultra-Compact Lightweight Design
- High-Performance Race Engineering
- Remote or direct-mounted option for either small or large reservoir, and convenient 1/8" NPT outlets.

POPULAR APPLICATIONS

- Asphalt Modified
Dirt or Pavement
- Open Wheel
Sprint, Midget
- Stock Car
NASCAR, BGN, CTS, ARCA
- Super Late Model
ASA, All Pro, SW Tour
- Late Model Dirt
STARS, UMP, IMCA
- Kit Car
- Off Road
- Road Race
- Drifter



(805) 388-1188
www.wilwood.com

Asphalt Modified

Kit Car

Super Late Model

Stock Car

Open Wheel

Drifter



Performance

- **Instant Response** - Extreme close tolerance cut-off and equalization ports deliver immediate activation without wasted pedal travel.
- **Positive Release** - Extra heavy rate internal return springs provide smooth operation and firm, positive release.
- **Cool Running** - Reduced external surface area and a composite fluid reservoir minimize absorption of external radiant heat.



Design


- **Over 2" Additional Clearance** - Compared to full size combination master cylinders, the ultra short 3.37" compact body provides 2.16" of additional clearance between the mounting flange and the fluid outlet.
- **No Loss Of Volume Or Stroke Capacity** - A full 1.12" of piston stroke meets or exceeds the stroke capacity of most full size cylinders.
- **Tested Tough** - Proven durable with piston, bore, and seal designs tested to survive over 100,000 cycles.
- **Corrosion Free** - Black E-Coated aluminum bodies resists corrosion and maintain a durable long lasting finish.
- **American Made** - Proudly made in the U.S.A.

COMBINATION MASTER CYLINDER KITS			
CYLINDER BORE DIA.	PART NUMBER	CYLINDER BORE DIA.	PART NUMBER
5/8"	260-10371	7/8"	260-10374
3/4"	260-10372	1"	260-10375
13/16"	260-10373	1-1/8"	260-10376

- Wilwood's new Compact Combination Master Cylinders have been fully redesigned for limited space applications requiring the output capacity of a full-size master cylinder.

Installation & Maintenance

- **Simplified Plumbing** - 1/8" NPT outlets provide a positive seal and reduce the potential for stripped threads.
- **Simplified Bleeding** - Fluid outlet ports located at the top radius of the cylinder bore reduce the chances for trapped air and eliminate the need for body mounted bleed screws.
- **Versatile** - 4 mounting options with choices for direct or remote mounting of 7 or 10 ounce reservoirs that include an impact resistant threaded cap with an internal baffle and seals.

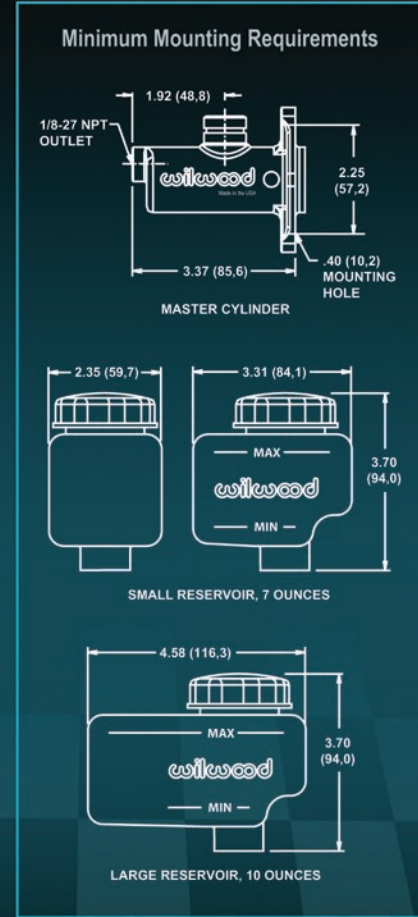

Actual Size - 7 oz. Direct Mount Reservoir



(805) 388-1188
www.wilwood.com

Road Race



Super Late Model



Asphalt Modified



Off Road



Kit Car



Late Model Dirt



Open Wheel

