
XRP ADAPTER FITTINGS FOR POWER STEERING HOSE



POWER STEERING HOSE

This premium quality power steering hose is made of elastomer tube, polyester inner braid with single wire braid reinforcement and polyester braid cover. Operating temperature is between -55°F and +300°F (except air +250°F). Suitable for many applications: air, gasoline, fuel and lubricants, over-the-wall air tools, etc.

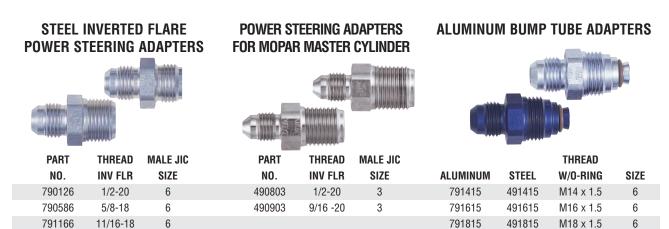

SIZE	BULK HOSE●	CUT TO EXACT LENGTH AND PRE-PACKAGED IN RETAIL BOX **SEE NOTE BELOW					
	(Specify Length)	3 FT.	6 FT.	10 FT.	15 FT.	20 FT.	
6	510006	510306	510606	511006	511506	512006	
8	510008	510308	510608	511008	511508	512008	
10	510010	510310	510610	511010	511510	512010	

TECHNICAL SPECIFICATIONS

SIZE	HOSE I.D.	HOSE O.D.	MAX OPERATING	BURST	WEIGHT	MINIMUM BEND
			PRESSURE (PSI)	PRESSURE (PSI)	LBS./FOOT	RADIUS (INCHES)
6	.31"	.67"	2250	9,000	.23	4.00
8	.41"	.77"	2000	8,000	.26	4.62
10	.50"	.92"	1750	7,000	.37	5.50

[•] Bulk hose lengths may be slightly over or under length specified. See bulk hose shipping length patterns on price sheet or on page 73 of this catalog.

^{**}NOTE: Pricing for pre-packaged hose includes an additional packaging charge.