



FORGED BILLET SUPERLITE CALIPER

Caliper Highlights:

The Superlite caliper series has set the standard for many years in short track, late model, modified and open wheel competition. It has also enjoyed prominence in a variety of road-race, off-road, rally and sport driving applications. Starting at 4.40 pounds, the **Forged Billet Superlite (FSL)** is the newest innovation to this series from Wilwood. New and adaptive technologies have been applied providing substantial improvements in strength, fluid volume displacement, and overall performance.



The most noteworthy feature of this new caliper design is the forging. Each body is stress-flow forged from premium grade aluminum alloy billets. Stress-flow forging re-aligns the metal's internal grain structure to flow within the contour of the caliper body. This process eliminates the stresses and interruptions to the internal grain structure that occur when machining a straight block billet. Simply stated, there is no better way to build a stronger aluminum caliper body.

Black Red

The **FSL** body design is a highly efficient product of computer generated solid modeling and stress analysis technology. Each caliper features closed end bridges with a radial transition to the piston body housings. The elimination of machined steps and sharp shoulders in this critical area provides a measurable increase in overall body strength and resistance to deflection under load. Center bridge bolts replace cotter pins to provide additional support and allow quick access with positive brake pad retention. Clamping force, structural deflection, and volume displacement tests have proven the superior strength and efficiency of the **FSL**. On-track testing has proven driver satisfaction. The bottom line is better stopping power with less pedal travel.

The superior strength of this innovative new caliper is combined with proven performance features from other Wilwood designs. Each caliper is equipped with Wilwood's replaceable SRS stainless steel bridge plates. SRS plates eliminate the bridge wear caused by pad gouging and extend the service life of the caliper body. The spring-loading action of the SRS plates also eliminates pad rattle and dampens the vibration harmonics that contribute to squeal under braking. Other standard Wilwood features include high-temperature, square faced o-ring seals for positive sealing, controlled piston retraction, and long service life in high heat conditions. Stainless steel pistons are used to resist corrosion and retard heat transfer from the pads. Fluid tubes are vibration dampened to resist stress fractures and reduce damage caused by track debris. Two-piece bleed screw assemblies provide long, reliable service life and are easily replaced if necessary.

Forged Billet Superlite calipers are a direct replacement for all Wilwood Superlite and similar competitive brand calipers with 3.50" centered mounting tabs. Calipers are available in the popular 1.75", 1.62", 1.38", 1.25" and 1.12" piston sizes for .81", 1.10" and 1.25" rotor widths. **FSL** calipers use the same 7420 type bridge bolt brake pad used in all Superlite 6 piston calipers. The full range of PolyMatrix pad compounds is available to match brake response and heat range to any application.


CALIPER ORDERING INFORMATION:⁽¹⁾

BORE SIZE		DISC WIDTH		PART NUMBER
1.75"	44,5 mm	1.25"	31,8 mm	120-7429-R/L
1.75"	44,5 mm	1.10"	27,9 mm	120-7476-R/L
1.75"	44,5 mm	.81"	20,6 mm	120-7430-R/L
1.75"	44,5 mm	.81"	20,6 mm	120-7430-SI
1.62"	41,1 mm	1.25"	31,8 mm	120-8466-R/L
1.62"	41,1 mm	1.10"	27,9 mm	120-8465-R/L
1.62"	41,1 mm	.81"	20,6 mm	120-8464-R/L ⁽²⁾
1.38"	35,0 mm	1.25"	31,8 mm	120-7431-R/L
1.38"	35,0 mm	1.10"	27,9 mm	120-7477-R/L
1.38"	35,0 mm	.81"	20,6 mm	120-7432-R/L ⁽²⁾
1.25"	31,8 mm	1.25"	31,8 mm	120-7792-R/L
1.25"	31,8 mm	.81"	20,6 mm	120-7794-R/L
1.12"	28,4 mm	1.25"	31,8 mm	120-8282-R/L
1.12"	28,4 mm	.81"	20,6 mm	120-8283-R/L

NOTES: (1) REFERENCE FRONT OF MANUAL FOR GENERAL ORDERING INFORMATION (SI = SIDE INLET)
(2) AVAILABLE RED, ADD "RD" TO END OF PART NUMBER WHEN ORDERING



FORGED BILLET SUPERLITE CALIPER, MOUNTING DIMENSIONS:

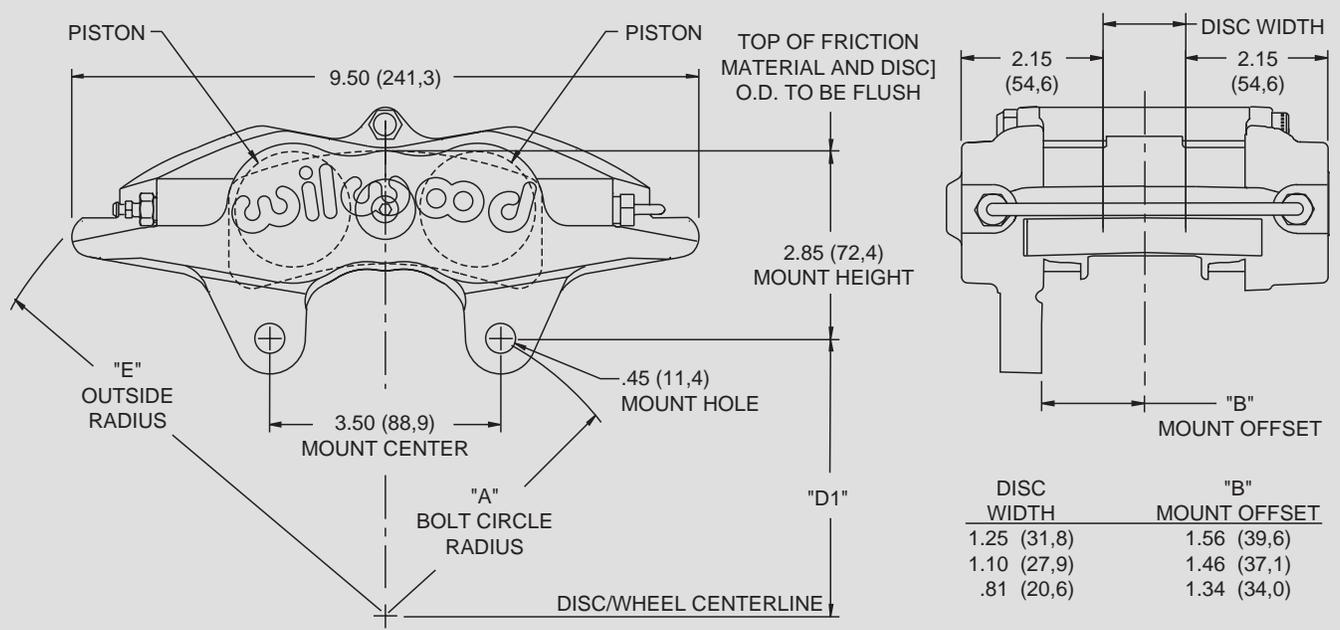


DIMENSION "D1" = (DISC DIAMETER/2) - 2.85 (72,4)

NOTE: RIGHT HAND CALIPER SHOWN. LEFT HAND CALIPER HAS BLEED SCREW AND CROSSOVER TUBE REVERSED.

INLET FITTING: 1/8-27 NPT

FORGED BILLET SUPERLITE BRAKE PAD TYPE 7420 - PAD VOLUME = 4.9 CU. IN.:

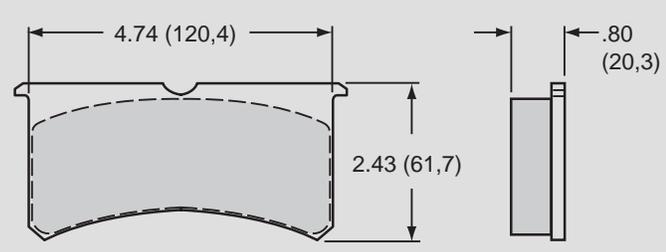

AXLE SET P/N	PAD TYPE / COMPOUND
15A - 5938K	7420 A PolyMatrix
15B - 5939K	7420 B PolyMatrix
15C - 6853K	7420 C PolyMatrix
15E - 6084K	7420 E PolyMatrix
15H - 8114K	7420 H PolyMatrix
15Q - 6829K	7420 Q PolyMatrix
150 - 8854K	7420 10 BP-10 Smart Pad
150 - 9416K	7420 20 BP-20 Smart Pad
150 - 9864K	7420 30 BP-30 Smart Pad
150 - 8323K	7420 SM For Titanium Rotor

SERVICE PARTS ORDERING INFORMATION:

CALIPER PART NO.	PISTON	SQ RING KIT (4 PK)	BLEED SCREW KIT (4 PK)	CROSSOVER TUBE KIT (4 PK)	SELF BLEED TUBE (EA)	BRIDGE BOLT KIT	BRIDGE WEAR PLATE-R/L (EA)
120-7429	200-7531 (1.75")	130-2655	220-6069	190-5975	190-8310	230-7541	300-5922/23
120-7430	200-7531 (1.75")	130-2655	220-6069	190-5973	—	230-7539	300-5922/23
120-7431	200-7516 (1.38")	130-2658	220-6069	190-5975	190-8310	230-7541	300-5922/23
120-7432	200-7516 (1.38")	130-2658	220-6069	190-5973	—	230-7539	300-5922/23
120-7476	200-7531 (1.75")	130-2655	220-6069	190-5974	—	230-7540	300-5922/23
120-7477	200-7516 (1.38")	130-2658	220-6069	190-5974	—	230-7540	300-5922/23
120-7792	200-7514 (1.25")	130-2479	220-6069	190-5975	190-8310	230-7541	300-5922/23
120-7794	200-7514 (1.25")	130-2479	220-6069	190-5973	—	230-7539	300-5922/23
120-8282	200-7513 (1.12")	130-2579	220-6069	190-5975	190-8310	230-7541	300-5922/23
120-8283	200-7513 (1.12")	130-2579	220-6069	190-5973	—	230-7539	300-5922/23
120-8464	200-7519 (1.62")	130-4346	220-6069	190-5973	—	230-7539	300-5922/23
120-8465	200-7519 (1.62")	130-4346	220-6069	190-5974	—	230-7540	300-5922/23
120-8466	200-7519 (1.62")	130-4346	220-6069	190-5975	190-8310	230-7541	300-5922/23

Brakes are critical safety components, see warnings and disclaimer on page 131



FSL4 & FSL4/ST DIFFERENTIAL PISTON BORE CALIPER

Caliper Highlights:

The Superlite caliper series once again has a cutting-edge performer in the new differential piston bore version. Differential piston bores compensate for leading-edge mechanical loading and temperature variance across the pad face to reduce pad taper wear in sustained high temperature applications. **Thermlock**® pistons in the **FSL4/ST** and heavy wall stainless steel pistons in the **FSL4** models provide choices for two levels of protection against conductive heat transfer to the seals, fluid, and caliper body. Both the **FSL4** and **FSL4/ST** start at just 4.40 pounds.



This caliper was designed for maximum structural efficiency utilizing computer generated solid modeling and FEA stress analysis design technology.

The stress flow forging process aligns the internal grain structure for improved strength and durability over simple block billet machined components. Full width bridges featuring a radial transition from the piston housings are combined with center bridge bolts for maximum resistance against body deflection and separation under load.

■ Black

The extreme duty **FSL4/ST** caliper model features **Thermlock**® pistons for the highest degree of protection against conductive heat transfer from the pads to the fluid, seals, and body. Average caliper temperatures are reduced by 25% over stainless pistons. The standard duty **FSL4** model is equipped with the industry's heaviest wall stainless steel pistons. These pistons eliminate high-pressure deflection while providing full resistance to corrosion and slower heat transfer over common steel or aluminum pistons.

The superior strength of this innovative new caliper is combined with proven performance features from other Wilwood designs. Each caliper is equipped with Wilwood's replaceable SRS stainless steel bridge plates. SRS plates eliminate the bridge wear caused by pad gouging and extend the service life of the caliper body. The spring-loading action of the SRS plates also eliminates pad rattle and dampens the vibration harmonics that contribute to squeal under braking. Other standard Wilwood features include high-temperature, square faced piston seals which provide a full contact sealing surface and maintain their resilience through long service cycles for effective and controlled piston retraction. Fluid transfer tubes are dampened and recess mounted to eliminate fatigue from vibration while adding protection against damage from track or road born debris. Center bridge bolts provide positive pad retention with easy access for service without caliper removal. Two-piece bleed screw assemblies provide long, reliable service life and are easily replaced if necessary.

Forged Billet Superlite differential piston bore calipers are a direct replacement for all Wilwood Superlite and similar competitive brand calipers with 3.50" centered mounting tabs. Calipers are available in the popular 1.88/1.75" piston sizes for .81", and 1.25" rotor widths. **FSL4/ST** calipers use the same 7420 type bridge bolt brake pad used in all Superlite 6 piston calipers. The full range of PolyMatrix and Wilwood BP series pad compounds are available to match brake response and heat range to any application.

FSL4 WITH THERMLOCK® PISTONS CALIPER ORDERING INFORMATION:⁽¹⁾

BORE SIZE	DISC WIDTH	REAR MOUNT PART NO.	
		RH	LH
1.88 / 1.75" 47,8 / 44,5 mm	1.25" 31,8 mm	120-9579-RS	120-9580-RS
1.88 / 1.75" 47,8 / 44,5 mm	0.81" 20,6 mm	120-9577-RS	120-9578-RS

FSL4 WITH STAINLESS STEEL PISTONS CALIPER ORDERING INFORMATION:⁽¹⁾


BORE SIZE	DISC WIDTH	REAR MOUNT PART NO.	
		RH	LH
1.88 / 1.75" 47,8 / 44,5 mm	1.25" 31,8 mm	120-9575-RS	120-9576-RS
1.88 / 1.75" 47,8 / 44,5 mm	0.81" 20,6 mm	120-9573-RS	120-9574-RS

NOTES: (1) REFERENCE FRONT OF MANUAL FOR GENERAL ORDERING INFORMATION

WARNING: The user or installer of any product from this catalog must determine its suitability for their intended purpose or application



FORGED BILLET SUPERLITE 4 CALIPER, MOUNTING DIMENSIONS:

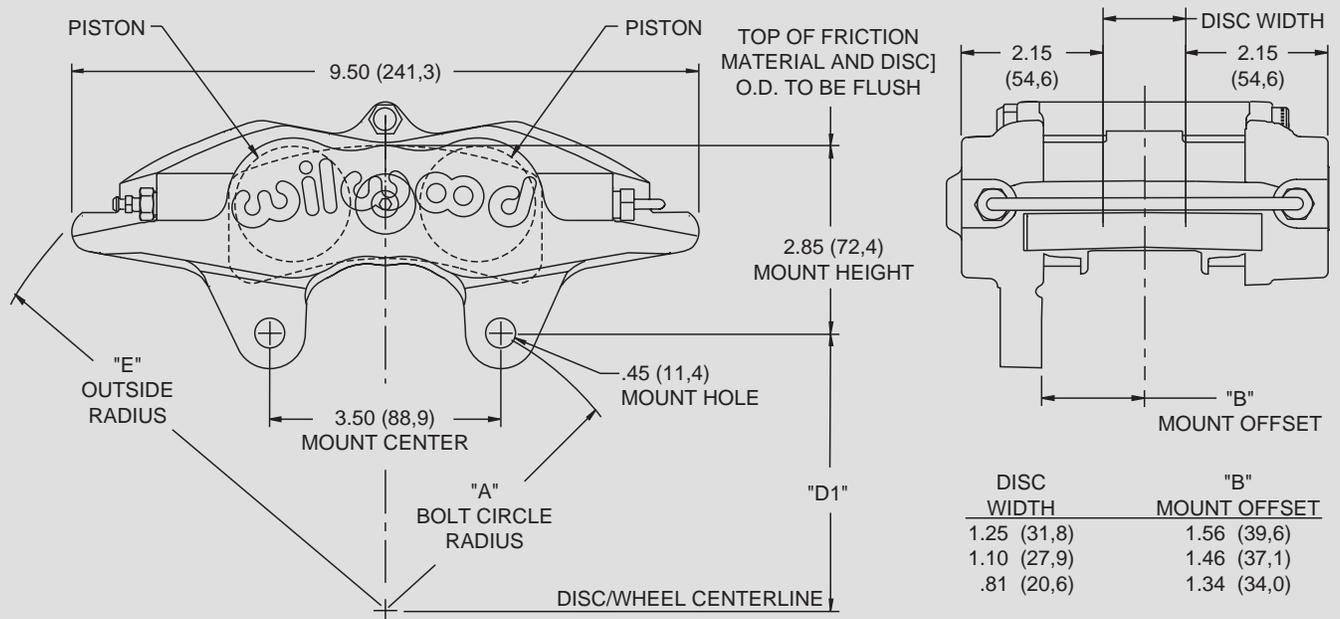

DISC WIDTH	"B" MOUNT OFFSET
1.25 (31,8)	1.56 (39,6)
1.10 (27,9)	1.46 (37,1)
.81 (20,6)	1.34 (34,0)


DIMENSION "D1" = (DISC DIAMETER/2) - 2.85 (72,4)

NOTE: RIGHT HAND CALIPER SHOWN. LEFT HAND CALIPER HAS BLEED SCREW AND CROSSOVER TUBE REVERSED.

INLET FITTING: 1/8-27 NPT

DISC DIAMETER	"A" BOLT CIRCLE RADIUS	"E" OUTSIDE RADIUS
11.75 (298,5)	3.50 (88,9)	6.69 (169,9)
12.19 (309,6)	3.69 (93,7)	6.85 (174,0)
12.72 (323,1)	3.92 (99,6)	7.05 (179,1)
12.88 (327,2)	4.00 (101,6)	7.12 (180,8)
13.00 (330,2)	4.05 (102,9)	7.18 (182,4)

FORGED BILLET SUPERLITE 4 BRAKE PAD TYPE 7420 - PAD VOLUME = 4.9 CU. IN.:

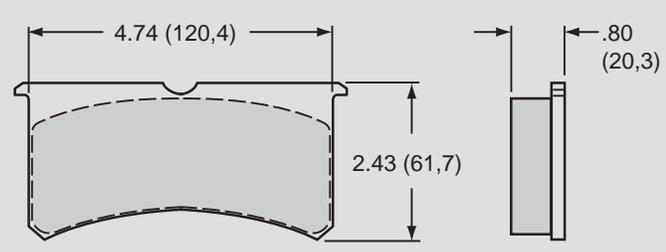

AXLE SET P/N	PAD TYPE / COMPOUND
15A - 5938K	7420 A PolyMatrix
15B - 5939K	7420 B PolyMatrix
15C - 6853K	7420 C PolyMatrix
15E - 6084K	7420 E PolyMatrix
15H - 8114K	7420 H PolyMatrix
15Q - 6829K	7420 Q PolyMatrix
150 - 8854K	7420 10 BP-10 Smart Pad
150 - 9416K	7420 20 BP-20 Smart Pad
150 - 9864K	7420 30 BP-30 Smart Pad
150 - 8323K	7420 SM For Titanium Rotor

SERVICE PARTS ORDERING INFORMATION:

CALIPER PART NO.	PISTON	SQ RING KIT (4 PK)	BLEED SCREW KIT (4 PK)	CROSSOVER TUBE KIT (4 PK)	SELF-BLEED TUBE (EA)	BRIDGE BOLT KIT	BRIDGE WEAR PLATE (EA)
120-9573	200-7521 (1.88") 200-7531 (1.75")	130-2427	220-6069	190-5973	—	230-7539	300-5922 (R/H) 300-5923 (L/H)
120-9574	200-7521 (1.88") 200-7531 (1.75")	130-2427	220-6069	190-5973	—	230-7539	300-5922 (R/H) 300-5923 (L/H)
120-9575	200-7521 (1.88") 200-7531 (1.75")	130-2427	220-6069	190-5975	190-8310	230-7541	300-5922 (R/H) 300-5923 (L/H)
120-9576	200-7521 (1.88") 200-7531 (1.75")	130-2427	220-6069	190-5975	190-8310	230-7541	300-5922 (R/H) 300-5923 (L/H)
120-9577	200-7550 (1.88") 200-7551 (1.75")	130-2427	220-6069	190-5973	—	230-7539	300-5922 (R/H) 300-5923 (L/H)
120-9578	200-7550 (1.88") 200-7551 (1.75")	130-2427	220-6069	190-5973	—	230-7539	300-5922 (R/H) 300-5923 (L/H)
120-9579	200-7550 (1.88") 200-7551 (1.75")	130-2427	220-6069	190-5975	190-8310	230-7541	300-5922 (R/H) 300-5923 (L/H)
120-9580	200-7550 (1.75") 200-7551 (1.75")	130-2427	220-6069	190-5975	190-8310	230-7541	300-5922 (R/H) 300-5923 (L/H)

Brakes are critical safety components, see **warnings** and **disclaimer** on page 131