




DIRECTIONAL VANE ROTORS

HD SERIES DIRECTIONAL VANE ROTORS:

HD-48 and **HD-36** Series directional vane rotors provide superior thermal stability and long service for asphalt late models, modifieds, open wheel, and most other types of high heat competition applications. All **HD** rotors are cast from premium grade, long grain carbon iron for long wear, high thermal stability and resistance to distortion. Thick wall pad sweep faces with directional cooling vanes provide superior

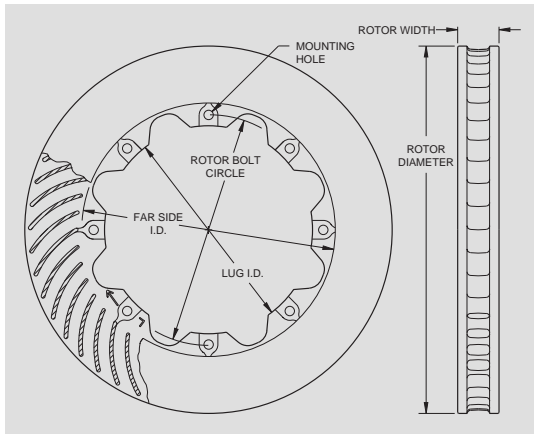

heat absorption and dissipation qualities to prevent heat fade and realize long service life from the pads and rotors. All **HD** rotor faces are precision turned to less than .001" for flatness, parallelism, and run-out for smoother engagement and reduced vibration.



ROTOR ORDERING INFORMATION:

DIAMETER	WIDTH	BOLT CIRCLE	HOLE TYPE	FAR SIDE I.D.	LUG I.D.	WEIGHT LBS	RH / LH	PART NUMBER
12.19" (309,7)	1.38" (35,0)	8 x 7.62" (193,6)	5/16-24	8.41" (213,6)	6.90" (175,3)	14.8	RH	160-3874
12.19" (309,7)	1.38" (35,0)	8 x 7.62" (193,6)	5/16-24	8.41" (213,6)	6.90" (175,3)	14.8	LH	160-3875
12.19" (309,7)	1.25" (31,8)	8 x 7.62" (193,6)	5/16-24	8.41" (213,6)	6.90" (175,3)	12.7	RH	160-3872
12.19" (309,7)	1.25" (31,8)	8 x 7.62" (193,6)	5/16-24	8.41" (213,6)	6.90" (175,3)	12.7	LH	160-3873
12.19" (309,7)	1.38" (35,0)	8 x 7.00" (177,8)	.313"	8.41" (213,6)	6.53" (165,9)	13.5	RH	160-2684
12.19" (309,7)	1.38" (35,0)	8 x 7.00" (177,8)	.313"	8.41" (213,6)	6.53" (165,9)	13.5	LH	160-2685
12.19" (309,7)	1.25" (31,8)	8 x 7.00" (177,8)	.313"	8.41" (213,6)	6.53" (165,9)	12.7	RH	160-3870
12.19" (309,7)	1.25" (31,8)	8 x 7.00" (177,8)	.313"	8.41" (213,6)	6.53" (165,9)	12.7	LH	160-3871
12.19" (309,7)	.81" (20,6)	8 x 7.00" (177,8)	.313"	8.34" (211,8)	6.38" (162,0)	9.5	RH	160-7705 ⁽¹⁾
12.19" (309,7)	.81" (20,6)	8 x 7.00" (177,8)	.313"	8.34" (211,8)	6.38" (162,0)	9.5	LH	160-7706 ⁽¹⁾
11.75" (298,5)	1.25" (31,8)	8 x 7.00" (177,8)	.313"	8.34" (211,8)	6.38" (162,0)	10.9	RH	160-3846
11.75" (298,5)	1.25" (31,8)	8 x 7.00" (177,8)	.313"	8.34" (211,8)	6.38" (162,0)	10.9	LH	160-3847
11.75" (298,5)	.81" (20,6)	8 x 7.00" (177,8)	.313"	7.87" (199,9)	6.38" (162,0)	8.5	RH	160-7701 ⁽¹⁾
11.75" (298,5)	.81" (20,6)	8 x 7.00" (177,8)	.313"	7.87" (199,9)	6.38" (162,0)	8.5	LH	160-7702 ⁽¹⁾

NOTES: (1) THESE ARE 36 VANE ROTORS

WARNING: The user or installer of any product from this catalog must determine its suitability for their intended purpose or application